



POLDER Level-1 Product

Data Format and User Manual

Ed. 3 - Rev. 0, October 30th, 2003

Prepared by F.-M. Bréon (CEA/LSCE)
with the collaboration of
CNES Project Team



Introduction	2
The POLDER instrument on ADEOS	2
Spectral bands.....	2
Polarization measurements.....	3
Spatial resolution	4
Data acquisition	4
Level-1 processing.....	5
Calibration.....	5
Radiometric processing.....	5
Geometric processing.....	6
Definitions	7
POLDER product identification	7
Geometry	7
Stokes parameters.....	7
Coding	8
Leader File Format	9
General structure	9
Leader file descriptor.....	9
Header	10
Spatio-Temporal Characteristics	10
Instrument setting parameters.....	12
Technological parameters.....	12
Data processing parameters.....	14
Scaling factors.....	15
Annotations.....	15
Data File Format.....	17
Data file descriptor.....	17
Data record.....	17
References.....	21
Acronymes	21
Appendix A : Product identification.....	22
Appendix B : POLDER Full resolution reference grid.....	23
Appendix C : Method for deriving the viewing geometry for each channel.....	25
Appendix D : Manipulation of polarization parameters.....	26
Appendix E : ADEOS-1 orbital characteristics	27
Appendix F : POLDER radiometric model.....	28
Appendix G : Pixel Quality Index (DQX)	31
Appendix H : How to locate a particular pixel in the data file.....	32

Last modified on October 30th, 2003

POLDER level-1 product

Data format and user manual

The concept of the POLDER instrument was imagined by several researchers from LERTS (Laboratoire d'Etudes et de Recherche en Télédétection Spatiale), CNES (Centre National d'Etudes Spatiales) and LOA (Laboratoire d'Optique Atmosphérique). The concept was then validated using an airborne version built and operated at LOA.

The spaceborne POLDER instrument has been developed by CNES in partnership with industrial contractors.

The POLDER ground segment has been developed, under CNES prime contractorship, in conjunction with various industrial contractors and partners (CEA/LSCE and Meteo France).

Scientific algorithms are defined and validated by the following science laboratories:

- Laboratoire d'Optique Atmosphérique (LOA)
- Laboratoire des Sciences du Climat et de l'Environnement (LSCE)
- Medias-France
- Laboratoire de Méétéorologie Dynamique (LMD)

For questions or comments: fmbreon@cea.fr

Introduction

The purpose of this document is to describe the POLDER level-1 data format, and to provide some information on how the data were derived from the measurements.

The document first gives some information on the POLDER instrument, its observation principle, and the level-1 data processing. It then describes in details the level-1 data format. The appendices provide some tools and equations for an in-depth use of the POLDER level-1 data.

The POLDER instrument on ADEOS

The POLDER radiometer design consists of three principal components: a CCD matrix detector, a rotating wheel carrying the polarizers and spectral filters, and a wide field of view (FOV) telecentric optics (Deschamps et al., 1994). The optics have a focal length of 3.57 mm, opening to f:4.5 with a maximum FOV of 114°.

The CCD sensor array is composed of 242 x 274 independent sensitive areas. The total array detection unit size is 6.5 x 8.8 mm which, according to the lens focal ratio, corresponds to along-track and cross-track FOVs of ±43° and ±51°, respectively, and to a diagonal FOV of ±57°. The CCD array is equipped with an antiblooming device which prevents image degradation when the incident radiance is above the sensor's dynamic range. The spectral sensitivity of the CCD array extends between 400 and 1050 nm.

The rotating wheel, which has a steady period of 4.9 s, supports the interference filters and polarizers that select the spectral bands and polarization directions. It carries 16 slots, one of which is an opaque filter to estimate the CCD detector *dark current*. The remaining 15 slots carry 6 unpolarized and 9 polarized filters (3 polarization directions for 3 different wavelengths). Thus, POLDER acquires measurements in 9 bands, 3 of which are polarized.

Spectral bands

Table 1 provides the spectral band characteristics for the POLDER instrument aboard the ADEOS-1 satellite. The 9 bands are defined by their central wavelength, spectral width, dynamic range and, polarization capabilities. The saturation levels are given, for two values of the acquisition integration time, in unit of normalised radiance, i.e. the maximum spectral radiance divided by the solar spectral

POLDER band	443P	443NP	490NP	565NP	670P	763NP	765NP	910NP	865P
Central Wavelength	444.5	444,9	492.2	564.5	670.2	763.3	763.1	907.7	860.8
Band Width	20	20	20	20	20	10	40	20	40
Polarization	Yes	No	No	No	Yes	No	No	No	Yes
Saturation level 105.1 ms	1.1	0.22	0.17	0.11	0.25	0.25	0.25	0.25	0.25
Saturation level 23.8 ms	-	0.97	0.75	0.48	1.1	1.1	1.1	1.1	1.1

Table 1 : Characteristics of the 9 POLDER bands. The central Wavelength λ_c is derived from the

$$\text{POLDER spectral transmission } T(\lambda) \text{ and the solar spectrum } S(\lambda) : \lambda_c = \frac{\int_0^{\infty} \lambda S(\lambda) T(\lambda) d\lambda}{\int_0^{\infty} S(\lambda) T(\lambda) d\lambda}$$


irradiance at nadir and multiplied by π . The dynamic reflectance range is subsequently obtained by dividing the range given in Table 1 by $\cos(\theta_s)$, where θ_s is the solar zenith angle.


Owing to the signal to noise requirements for ocean color measurements, the 443 nm channel had to be split into a polarized band (3 filters: 443P) and an unpolarized band (1 filter: 443NP). Each of the 3 polarized channels have large dynamic ranges, whereas the unpolarized channel has a low dynamic range optimized for the ocean color mission.

While POLDER mission to investigate the cloud and radiative budget requires a large dynamic range in the measurements, its ocean color mission requires a very precise radiometric resolution at low signal values. During the instrument definition phase, these two missions appeared to be in conflict. It was therefore decided to add the possibility of using alternatively two dynamic ranges by changing the exposure time to the incident photons. The measurements acquired with a "Long Integration Acquisition" (LIA) will have a better signal to noise ratio than with a "Short Integration Acquisition" (SIA), but will saturate more frequently. The saturation levels given in Table 1 correspond to the two values of the integration time which are currently planned for SIA and LIA.

Polarization measurements

For three of the eight spectral bands (443, 670 and 865 nm), a polarizer is added to the filters in order to assess the degree of linear polarization and the polarization direction. These parameters are derived by combining measurements in three channels with the same spectral filters but with the polarizer axes turned by steps of 60° . The three polarization measurements in a spectral band are successive and have a total time lag of 0.6 s between the first and the third (last) measurement. In order to compensate for

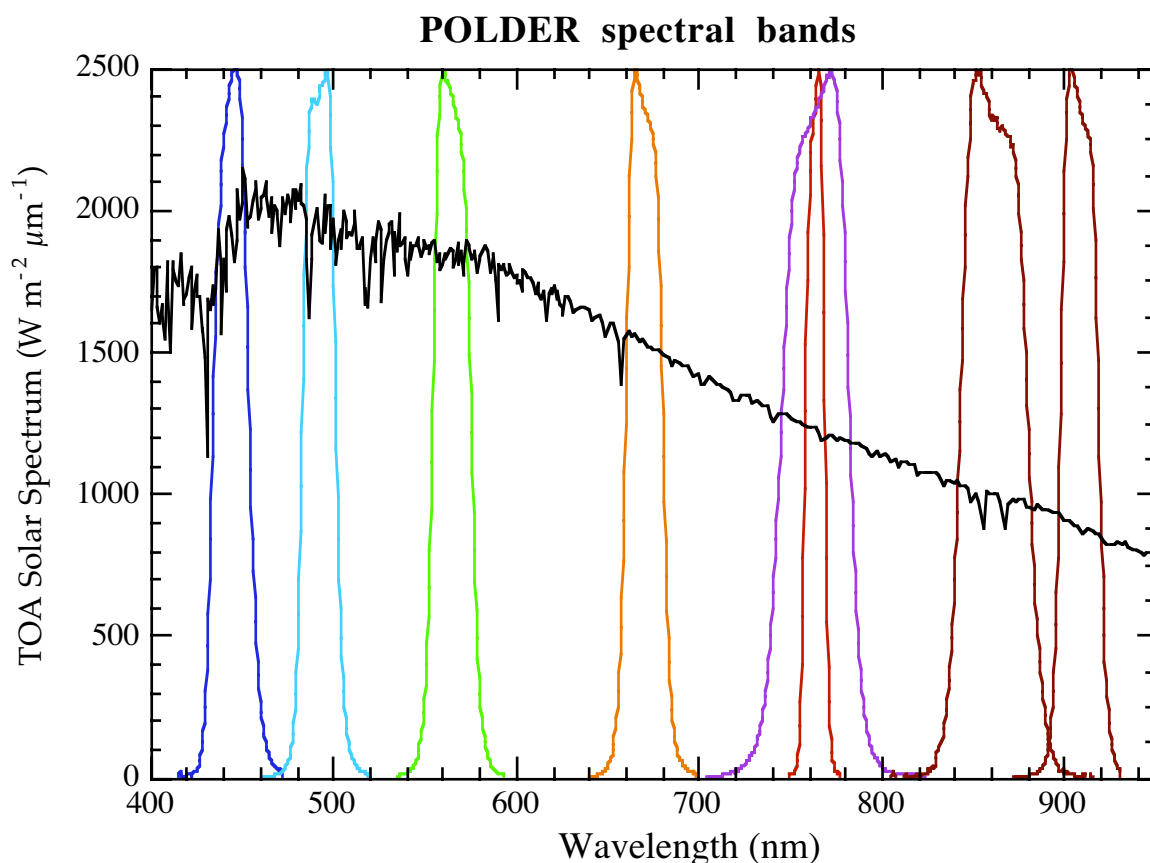

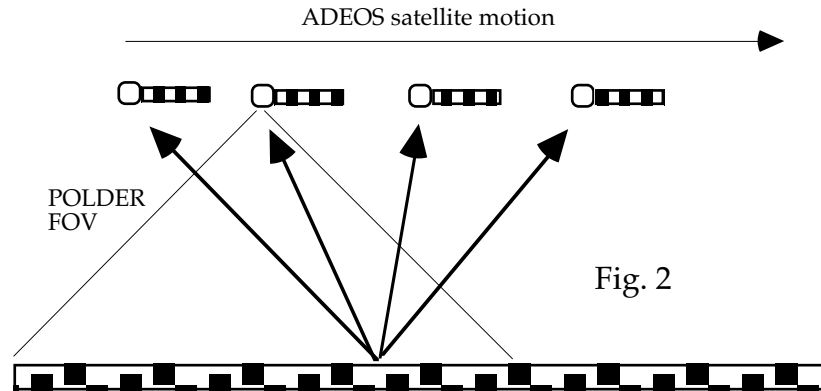

spacecraft motion during the lag and to register the three measurements, a small-angle, wedge prism is used in each polarizing assembly. As a consequence, the matrix image is translated in the focal plane to

offset the satellite motion, and the three polarization measurements are quasi collocated.

Spatial resolution

The ground size or resolution of a POLDER-measured pixel from ADEOS is 6 x 7 km² at nadir. Due to Earth curvature, the viewing angle relative to the local nadir is larger than the viewing angle in the satellite reference frame. Satellite angles (θ_{sat}) of 10°, 20°, 30°, 40° and 50° correspond to local viewing angles (θ_v) of 11.3°, 22.6°, 34.1°, 45.7° and 57.8°, respectively. This leads to a slight viewing angle dependence of the pixel size, leading to an increase of 21% for an incidence angle of 60°.

Data acquisition

The POLDER instrument is in imaging mode on the sunlit part of the ADEOS orbit only. Data acquisition starts when the solar zenith angle on the Earth surface at the satellite nadir is smaller than 75° and stops, in the South, when it is larger than 75°. The acquisition sequence is repeated every 19.6 seconds. A sequence is composed of 16 image acquisitions in the following order : Dark, 443P1, 443P2, 443P3, 443NP, 490NP, 565NP, 670P1, 670P2, 670P3, 763NP, 765NP, 910NP, 865P1, 865P2, 865P3. The total number of sequences in one orbit depends on the season and can be up to 130.

The 16 filter sequence is repeated every 19.6 s which corresponds to 4 rotations of the filter wheel. During this

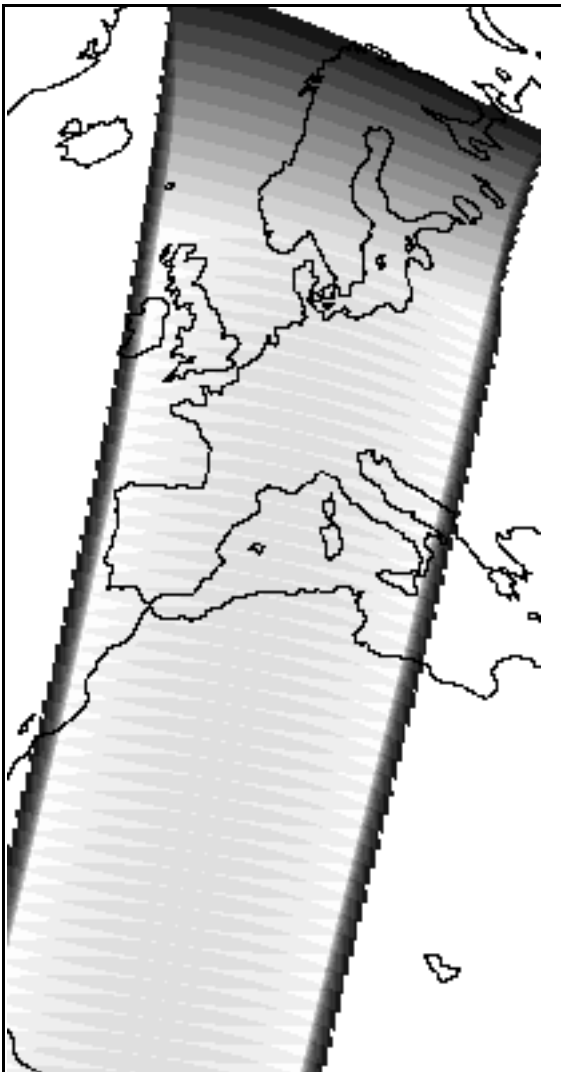


Fig. 3 : Number of viewing directions available for each surface pixel. Gray shades are from zero (Black) to fourteen (white). Twelve directions are available in the wide area around the satellite subtrack

interval, a given point on the surface, initially at nadir viewing, moves by about 9° relative to the satellite (Fig. 2). The point remains within the POLDER field. As the satellite passes over a target, about 12 (up to 14) directional radiance measurements (for each spectral band) are performed aiming at the point (Figure 3). Therefore, POLDER successive observations allow the measurement of the bidirectional reflectance properties of any target within the instrument swath.

Level-1 processing

ADEOS data are received either at the Fairbanks (Alaska), Wallops (Virginia) or Hatoyama (Japan) receiving stations. These data are then sent to the ADEOS processing centre where a preliminary processing is applied (demultiplexing; i.e. separation of the data from the different instruments). The POLDER level-0 data are then sent to CNES where they are systematically processed up to level-3. The present document is only concerned with level-1.

Calibration

The POLDER instrument does not include any onboard calibration device. The instrument calibration is achieved in flight using geophysical targets of known spectral and angular reflectance properties. The calibration coefficients are monitored and updated during the satellite life (Hagolle et al. , 1999). The calibration coefficients used for the level-1 processing are identified in the leader file ("Data processing parameters" record) by their version number.

The level-1 measurements are given in units of "normalized radiance" : the radiance ($W m^{-2} sr^{-1}$) has been multiplied by π/E_λ where E_λ is the extraterrestrial solar radiance accounting for the variations of sun-Earth distance. This choice (rather than expressing the measurements in units of $W m^{-2} sr^{-1}$) was made because the POLDER instrument is calibrated in flight against known *reflectances* rather than known *radiances*. The "normalized radiances" data can be converted to reflectances by a simple division by the cosine of the solar zenith angle.

Radiometric processing

The radiometric processing is based in part on the POLDER radiometric model described in Appendix F. Radiometric processing includes :

- Stray light correction
- Subtraction of "dark current"
- Data calibration
- Computation of Stokes parameters (I,Q,U) from the three measurements for the three polarized bands.
- Interpolation of the polarization parameters from the polarized to the unpolarized bands. Correction of the measurements for the lens polarizing effects (which depends on the input radiance polarization properties).

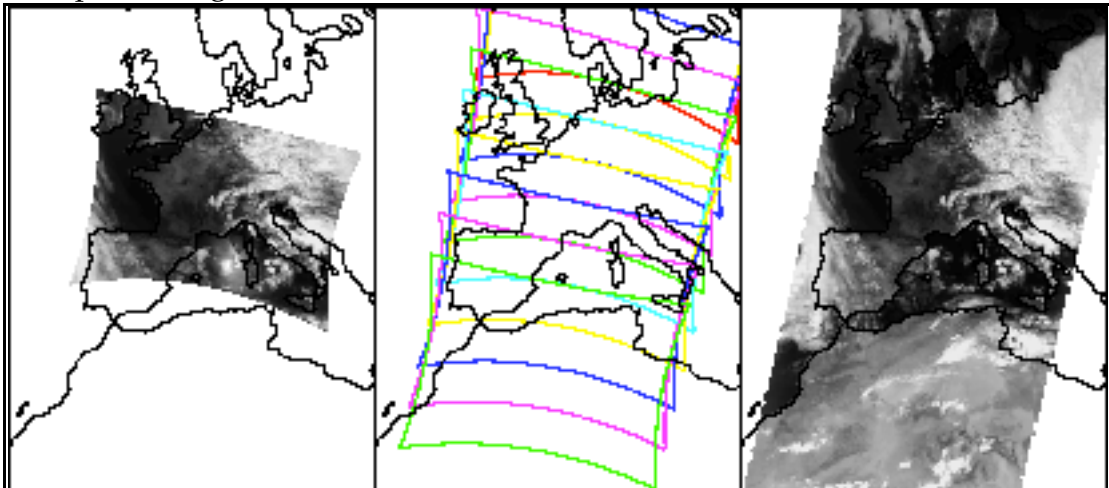


Fig. 4: A single POLDER acquisition by the CCD yield a bidimensional image of a fraction of the Earth (left image). For each channel, a similar acquisition is repeated every 19.6 seconds and the fields of view partially overlap. The center image indicates the borders of every third acquisitions. Level 1 processing integrates, for each Earth pixel of the reference grid, the POLDER observations (up to 14) of this pixel and generates a product where POLDER measurements are sorted by pixel (from North to South, and from West to East). The image on the right is the result of an extraction from a level-1 product. For each pixel, the observation with the smaller view zenith angle was selected.

All POLDER standard products are Earth registered. The geometric processing navigates the raw data which are registered in the instrument reference frame, to an Earth fixed reference frame. After projection on the Earth frame, accounting for the ADEOS attitude and the POLDER-ADEOS relative orientation, the data are interpolated on the POLDER reference grid using a bi-cubic algorithm. The POLDER-ADEOS relative orientation is calibrated in-flight using specific targets such as coastlines. The attitude bias coefficients used for level-1 processing are identified in the leader file ("Data processing parameters" record) by their version number.

In the level 1 product, the data are sorted by pixel of the Earth frame (from North to South, and from West to East). For each pixel, up to 14 sets of observations (with varying viewing geometries) are available. The acquisition sequence number and the line-column coordinates on the CCD matrix are available in the product, which allow to reconstruct the original CCD acquisition, as shown on the left image of Fig. 4.

The POLDER reference grid is described in Appendix B. The grid has a constant resolution along the meridians (18 pixels per 1° latitude band), and a variable resolution (when expressed in degrees; nearly constant in km) along the parallels, with the objective that all pixels have nearly identical areas.

Definitions

POLDER product identification


A POLDER standard product is composed of two files. A *leader* file and a *data* file. The *leader* file provides some information on the instrument and the data processing. The *data* file contains the instrument measurements, after radiometric and geometric processing, together with ancillary data.

A Level-1 product generated from POLDER-1 measurement is identified by P1L1TBG1ccccooov where *ccc* is the orbit cycle number, *ooo* the orbit number in the cycle, and *v* identifies the reprocessing number (See Appendix A). The *leader* and *data* filenames are *pppL* and *pppD* respectively, where *ppp* is the 15 characters product identifier.

Geometry

Four angles are included in the level-1 product :

- The solar azimuth, ϕ_S , is relative to the local North direction. It may vary between 0 and 360°. The solar azimuth is 90° when the sun is East of the observed pixel.
- The solar zenith angle, θ_S , is relative to the local zenith. It may vary between 0° (sun at zenith) and approximately 80°.
- The view zenith angle, θ_V , is relative to the local zenith. It may vary between 0° (POLDER at zenith) and approximately 75°.
- The relative azimuth, ϕ , is the difference in azimuth between the sun and the satellite directions: $\phi = \phi_S - \phi_V$ where ϕ_V is defined, as ϕ_S , with respect to the North direction. ϕ may vary between 0° and 360°. ϕ is 0°/360° for backscattering measurements, and 180° for glitter observation.

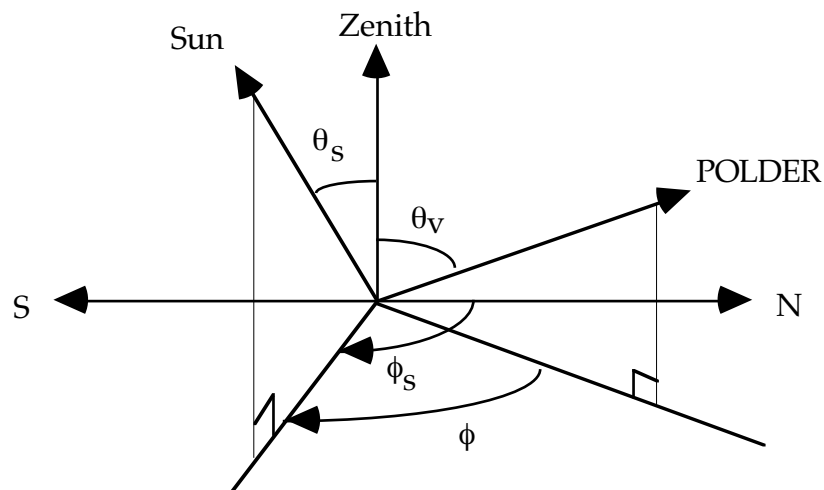

Stokes parameters

In addition to the total radiance I , the POLDER instrument measurements yield the description of the linear polarization for three spectral bands : 443P, 670P and 865P. In the POLDER level-1 product, this information is given as the second (Q) and third (U) components of the Stokes vector. The polarized radiance I_p and polarization direction χ can be derived from Q and U through :

$$I_p = (Q^2 + U^2)^{1/2}$$

$$I_p \sin(2\chi) = U$$

$$I_p \cos(2\chi) = Q$$

In the equations above, the polarization angle χ is defined with respect to the plane defined by the local zenith and the viewing direction. Appendix D provides some equations to get the polarization direction with respect to the scattering plane.

Coding

Most parameters of the leader file are written as formatted ASCII characters, whereas the data file has a binary structure.

In what follows, we make use of the following coding types :

Ax : indicates an ASCII field of length x bytes.

Fx.y indicates a real written on x characters with y digits after the floating point (as in FORTRAN). Ex:

F10.4 for -1234.5678

Ex.y indicates a real written in exponential form on x characters with y digits after the floating point (as in FORTRAN). Ex: **E14.4** for -1234.5678E-08

Bx indicates a succession of bits (for quality flags). x is the number of bytes used.

I4 indicates a four-bytes unsigned Integer (from 0 to $2^{32}-1$)

SI2 indicates a two-bytes signed integer (from -32768 to +32767)

I2 indicates a two-bytes unsigned Integer (from 0 to +65535)

SI1 indicates a one-byte signed integer (from -128 to +127)

I1 indicates a one-byte unsigned integer (from 0 to +255)

In the format description below, the special character "\$" is used to indicate the space character. Upper-case letters are used for fixed fields, whereas lower-case letters are used for variable fields.

Spare fields are filled with repetition of the "space" character.

For binary parameters, one or two values are reserved for "Dummy" and "Saturated" data. They depend on the parameter format as indicated in the table below. The "Dummy" value characterises missing data. The "Saturated" value characterises out of range data. Saturation is only expected for the parameters which are coded in SI2 (Radiances and polarized radiances in the data records).

	I1	SI1	I2	SI2
Saturated	-	-	-	32767
Dummy	0	-127	0	-32767

Leader File Format

General structure

The leader file is composed of 8 records of variable length. Its total length is 195840 Bytes :

Record Name	Record Length (Bytes)
Leader file descriptor	180
Header	360
Spatio-Temporal Characteristics	1620
Instrument setting parameters	180
Technological parameters	166320
Data processing parameters	720
Scaling factors	13140
Annotations	13320
<i>Total</i>	195840

Leader file descriptor

This record describes the data structure of the leader file.

Position	Type & Length	Content
1-4	I4	Record Number in the file : 1
5-8	I4	Length of this record : 180
9-20	A12	Reference Document Identification : PAST33131CN\$
21-26	A6	Reference Document Version Number : aa/bb\$
27-32	A6	Software Version Number : aa.bb\$
33-36	A4	File Number : 1\$\$\$
37-52	A16	File Name ¹ : PwL1TBG1ccccooovL
53-56	I4	Number of "header" record in the file : 1
57-60	I4	Length of the "Header" record : 360
61-64	I4	Number of "Spatio-Temporal Characteristics" records in the file : 1
65-68	I4	Length of the "Spatio-Temporal Characteristics" record : 1620
69-72	I4	Number of "Instrument setting parameters" records in the file : 1
73-76	I4	Length of the "Instrument setting parameters" record : 180
77-80	I4	Number of "Technological parameters" records in the file : 1
81-84	I4	Length of the "Technological parameters" record : 166320
85-88	I4	Number of "Data processing parameters" records in the file : 1

¹ See Annexe A for the POLDER standard for filenames

89-92	I4	Length of the "Data processing parameters" record : 720
93-96	I4	Number of "Scaling factors" records in the file : 1
97-100	I4	Length of the "Scaling factors" record : 13140
101-104	I4	Number of "Annotation" records in the file : 1
105-108	I4	Length of the "Annotation" record : 13320
109-180	A72	Spare

Header

The "header" record gives general information on the product and the models used for data registration.

Position	Type & Length	Content
1-4	I4	Record Number in the file : 2
5-8	I4	Length of this record : 360
9-24	A16	Information Point Phone Number
25-40	A16	Product identification : PwL1TBG1ccccooov\$
41-48	A8	Satellite identificator (x=1 or 2) : ADEOS\$x\$
49-56	A8	Instrument identificator (x=1 or 2) : POLDER\$x
57-72	A16	Spatial Coverage : VIEWING\$SEGMENT\$
73-80	A8	Pixel size of the POLDER reference grid (km) : 006.180\$
81-110	A30	Name of the ellipsoid used for the data registration : GEODETTIC\$REFERENCE\$SYSTEM\$1980
111-122	F12.4	Length of the ellipsoid minor axis (meter) : 6356752.3141
123-134	F12.4	Length of the ellipsoid major axis (meter) : 6378137.0000
135-164	A30	Name of the Digital Elevation Model (DEM) used for the data registration : TERRAIN-BASE (NOAA) \$\$\$\$\$\$\$\$\$\$
165-172	A8	Spatial resolution of the DEM along the latitudes (in degrees) : aaa.aaa\$
173-180	A8	Spatial resolution of the DEM along the longitudes (in degrees) : aaa.aaa\$
181-360	A180	Spare

Spatio-Temporal Characteristics

This records provides some information on the Earth temporal and spatial coverage for this viewing segment.

Position	Type & Length	Content
1-4	I4	Record Number in the file : 3
5-8	I4	Length of this record : 1620

9-12	A4	Cycle Number : ccc\$
13-16	A4	Orbit Number in the cycle : ooo\$
17-20	A4	Sub satellite track number ² : ttt\$
21-50	A30	Spare
51-58	A8	Descending Node Longitude : ddd.ddd\$ (0 - 360°)
59-74	A16	Descending node date and UT time : yyyyymmddhhmmsscc
75-100	A26	Spare
111-116	A16	Date and UT time of the first image acquisition for the viewing segment : yyyyymmddhhmmsscc
117-132	A16	Date and UT time of the last image acquisition for the viewing segment : yyyyymmddhhmmsscc
133-200	A68	Spare
201-204	A4	Number of sequences in the viewing segment ($1 \leq N_{seq} \leq 130$)
205-300	A96	Spare
301-304	A4	Line Number of the northern most pixel observed by POLDER in the viewing segment: nnnn ($0001 \leq nnnn \leq 3240$) ³
305-308	A4	Line Number of the southern most pixel observed by POLDER in the viewing segment: nnnn ($0001 \leq nnnn \leq 3240$)
309-400	A92	Spare
393 + 8 is ⁴ - 396 + 8 is	A4	Line Number of the Earth pixel located at the ADEOS nadir during POLDER acquisition of filter 670P2 of sequence #is : nnnn $1 \leq nnnn \leq 3240$ if $1 \leq is \leq N_{seq}$; nnnn=0000 if $is > N_{seq}$
397 + 8 is - 400 + 8 is	A4	Column Number of the Earth pixel located at the ADEOS nadir during POLDER acquisition of filter 670P2 of sequence #is : nnnn $1 \leq nnnn \leq 6480$ if $1 \leq is \leq N_{seq}$; nnnn=0000 if $is > N_{seq}$
1441-1620	A180	Spare

² See Appendix E for ADEOS orbital characteristics and usefull relationships on cycle, orbit and track numbers.

³ If only a given geographical area is ordered from the POLDER processing center, this field and the next one are automatically updated in agreement with the area selection.

⁴ is is the sequence number. $1 \leq is \leq 130$

Instrument setting parameters

This record describes the integration time sequencing (Short Integration Acquisition versus Long Integration Acquisition) used for this viewing segment, as well as the gain.

Position	Type & Length	Content
1-4	I4	Record Number in the file : 4
5-8	I4	Length of this record : 180
9-16	A8	Short Integration Acquisition (SIA) duration (ms) : mmm.mmm\$
17-24	A8	Long Integration Acquisition (LIA) duration (ms) : mmm.mmm\$
25-40	A16	Integration Time definition for sequence type A : tttttttttttttttt with t=S (SIA duration) or t=L (LIA duration). The 16 characters correspond to the 16 POLDER filters in the following order : Dark , 443P1, 443P2, 443P3, 443NP, 490NP, 565NP, 670P1, 670P2, 670P3, 763NP, 765NP, 910NP, 865P1, 865P2, 865P3
41-56	A16	Integration Time definition for sequence type B : tttttttttttttttt with t=S (SIA duration) or t=L (LIA duration). Same as above
57-72	A16	Typical arrangement of sequence types A and B : ccccccccccc\$\$\$ ⁵ with c=1 (Sequence type A) or c=2 (Sequence type B). Examples : 111111111111 : All sequence acquisitions are type A 121212121212 : Sequence acquisitions are alternatively type A and type B
73-74	A2	Analogic gain number : g\$ (1≤g≤7)
75-180	A106	Spare

Technological parameters

In this record the temperature of the lens are given for each -up to 130- acquisition sequence. The two temperatures are for the internal lens (L5 to L10) and the external lens (L1 and L2).

The record also contains the position, speed vector and attitude parameters of the POLDER instrument for each -up to 130- acquisition sequences, and 9 images per sequence. The 9 images correspond to the spectral bands 443P, 443NP, 490NP, 565NP, 670P, 763NP, 765NP, 910NP, 865P. For each of the 3 polarized bands, only the values corresponding to the central filter are given.

⁵ 12 characters are used because POLDER electronics allows the programing of a succession of 12 sequences, which is then repeated.

The position and speed vectors are given in a referential fixed to the Earth with the Earth centre as the origin : The Z vector is from the Earth centre to the North Pole, X is from the Earth centre to intersection of the equator and the Greenwich line, and $Y=Z \wedge X$.

The attitude parameters, yaw, roll and pitch, are given as right handed rotation around respectively the X, Y, and Z axis of the orbital reference frame. The Z vector is from the satellite to the Earth centre. X is perpendicular to Z, in the plan containing X and the satellite speed vector, along the speed vector. $Y=Z \wedge X$.

The default value (no data) for the date, temperature, position, speed vector and attitude is 0.

Position	Type & length	Content
1-4	I4	Record Number in the file : 5
5-8	I4	Length of this record : 166320
1278 is - 1269 ⁶ 1278 is - 1266	A4	Sequence Number : sss\$ ($0 \leq sss \leq 130$). sss=is if the sequence was acquired and processed; sss=0 otherwise
1278 is - 1265 1278 is - 1250	F16.7	Internal lens temperature during the sequence (°C) : ±ttttttt.ttttttt
1278 is - 1249 1278 is - 1234	F16.7	External lens temperature during the sequence (°C) : ±ttttttt.ttttttt
1278 is + 138 im - 1371 ⁷ 1278 is + 138 im - 1370	A2	Image Number : i\$ ($0 \leq i \leq 9$). i=im if the sequence was acquired and processed; i=0 otherwise
1278 is + 138 im - 1369 1278 is + 138 im - 1354	A16	Date and UT time of the acquisition of image im in sequence is : yyyymmddhhmmsscc
1278 is + 138 im - 1353 1278 is + 138 im - 1338	F16.7	X component of the POLDER position during acquisition of image im in sequence is (km): ±ppppppp.ppppppp
1278 is + 138 im - 1337 1278 is + 138 im - 1322	F16.7	Y component of the POLDER position during acquisition of image im in sequence is (km): ±ppppppp.ppppppp
1278 is + 138 im - 1321 1278 is + 138 im - 1306	F16.7	Z component of the POLDER position during acquisition of image im in sequence is (km): ±ppppppp.ppppppp
1278 is + 138 im - 1305 1278 is + 138 im - 1290	F16.7	Vx component of the POLDER speed vector during the acquisition (km s^{-1}): ±vvvvvvv.vvvvvvv
1278 is + 138 im - 1289 1278 is + 138 im - 1274	F16.7	Vy component of the POLDER speed vector during the acquisition (km s^{-1}): ±vvvvvvv.vvvvvvv
1278 is + 138 im - 1273 1278 is + 138 im - 1258	F16.7	Vz component of the POLDER speed vector during the acquisition (km s^{-1}): ±vvvvvvv.vvvvvvv

⁶is is the sequence number. $1 \leq is \leq 130$

⁷im is the image number. $1 \leq im \leq 9$

1278 is + 138 im - 1257 1278 is + 138 im - 1250	F8.3	Yaw of the POLDER instrument during acquisition of image im in sequence is : ±yyy.yyy
1278 is + 138 im - 1249 1278 is + 138 im - 1242	F8.3	Pitch of the POLDER instrument during acquisition of image im in sequence is : ±ppp.ppp
1278 is + 138 im - 1241 1278 is + 138 im - 1234	F8.3	Roll of the POLDER instrument during acquisition of image im in sequence is : ±rrr.rrr
166149-166320	A127	Spare

Data processing parameters

This record provides information on the input data and the software version used to generate the Level-1 POLDER data.

Position	Type & Length	Content
1-4	I4	Record Number in the file : 6
5-8	I4	Length of this record : 720
9-16	A8	Level-0 data creation country : JAPAN\$\$\$
17-24	A8	Level-0 data creation agency : NASDA\$\$\$
25-40	A16	Level-0 data creation facility : HEOC-ADEOS\$-HREC
41-56	A16	Level-0 data creation date and UT time yyyymmddhhmmss\$\$
57-64	A8	Level-0 processing software version : e.r\$\$\$\$
65-200	A136	Spare
201-208	A8	Level-1 data creation country : FRANCE\$\$
209-216	A8	Level-1 data creation agency : CNES\$\$\$\$
217-232	A16	Level-1 data creation facility : CST-PGS\$\$\$\$\$\$\$\$
233-248	A16	Level-1 data creation date and UT time yyyymmddhhmmss\$\$
249-256	A8	Level-1 processing software version : ee.rr\$\$\$
257-272	A16	Identificator of the POLDER Level-0 data used as input : aaaaaaaaaaaaaaaa
273-280	A8	Version of the data used for radiometric calibration: ee.rr\$\$\$
281-296	A16	Date and UT time of creation of the radiometric calibration input file : yyymmddhhmmss\$\$
297-312	A16	Date and UT time of the beginning of applicability of the radiometric calibration: yyyymmddhhmmss\$\$
313-320	A8	Version of the data used for geometric processing : ee.rr\$\$\$
321-336	A16	Date and UT time of creation of the geometric data input file : yyymmddhhmmss\$\$
337-352	A16	Date and UT time of the beginning of applicability of the geometric data : yyyymmddhhmmss\$\$

353-356	B4	Product Confidence Data. This field contains several indicators on the product quality
357-720	A364	Spare

Scaling factors

This record describes the coding of the parameters in the data file. Most parameters are given using integer binary coding with either 1 or 2 bytes. The physical values (PV) can be computed from the Binary Values (BV) through :

$$PV = \text{Slope} \times BV + \text{Offset}$$

The Slope and the Offset are given for each parameter in this record.

Position	Type & Length	Content
1-4	I4	Record Number in the file : 7
5-8	I4	Length of this record : 13140
9-16	A8	Interleaving indicator : BIP\$\$\$\$
17-32	A16	Byte ordering standard (BIG ENDIAN or LITTLE ENDIAN): BIG\$ENDIAN\$\$\$\$ (as on IBM mainframes)
33-36	A4	Number of parameters per pixel : 327\$
37-44	A8	Number of bytes per pixel : 00000648
26 ip + 19 ⁸ 26 ip + 20	A2	Number of bytes for parameter #ip : nn
26 ip + 21 26 ip + 32	E12.5	Slope for the computation of physical value for parameter #ip : ±s.sssssE±bb
26 ip + 33 26 ip + 44	E12.5	Offset for the computation of physical value for parameter #ip : ±o.ooooE±cc
8547-13140	A4594	Spare

Annotations

This record gives some statistical information on the results of the level-1 processing. The percentages of "land", "water" and "mixed" pixels in the viewing segment are given. A rough cloud mask is applied to the data, and the percentage of cloud covered pixels for each 10° latitude band (first : 90N-80N, last : 80S-90S) is given. Finally, this record gives the number of observed pixels for each of the 3240 lines of the POLDER reference grid.

Position	Type	Content
1-4	I4	Record Number in the file : 8
5-8	I4	Length of this record : 13320
9-12	A4	Percentage of Dummy data found in level-0 : ppp\$ (0≤ppp≤100)

⁸ip is the parameter number. 1 ≤ ip ≤ 327

13-16	A4	Percentage of saturated observations : ppp\$ (0≤ppp≤100)
17-20	A4	Percentage of "land" pixels in the viewing segment : ppp\$ (0≤ppp≤100)
21-24	A4	Percentage of "ocean" pixels in the viewing segment : ppp\$ (0≤ppp≤100)
25-28	A4	Percentage of "coast" pixels in the viewing segment : ppp\$ (0≤ppp≤100)
4 ib + 25 ⁹ 4 ib + 28	A4	Percentage of pixels recognised as "cloudy" in the 10° latitude band #ib : ppp\$ (0≤ppp≤100)
101-200	A100	Spare
201-204	A4	Number of lines in the POLDER grid for which at least one pixel is present in the data file ¹⁰ : nnnn
4 il + 201 ¹¹ 4 il + 204	A4	Number of pixels (or records) in the data file for line #il (1≤il≤3240, from North to South) : nnnn (0≤nnnn≤6480)
13165-13320	A156	Spare

⁹ib is the 10° latitude band number (from North to South). $1 \leq ib \leq 18$

¹⁰If only a given geographical area is ordered from the POLDER processing center, this field and the next one are automatically updated in agreement with the area selection.

Data File Format

The Data file is composed of a first record of length 180 bytes, and a variable number of records equal to the number of pixels observed in the viewing segment (Npixels).

Record Name	Number of records	Record Length (Bytes)
Data file descriptor	1	180
Data record	Npixels	648

Data file descriptor

This record describes the data structure of the data file.

Position	Type & Length	Content
1-4	I4	Record Number in the file : 1
5-8	I4	Length of this record : 180
9-20	A12	Reference Document Identification : PAST33131CN\$
21-26	A6	Reference Document Version Number : aa/bb\$
27-32	A6	Software Version Number : aa.bb\$
33-36	A4	File Number : 2\$\$\$
37-52	A16	File Name ¹² : PwL1TBG1cccoovD
53-56	I4	Number of "data" records in the file : ($0 \leq N_{pixels} \leq 1.2 \cdot 10^6$)
57-60	I4	Length of one "data" record : 648
61-100	A40	Spare
101-104	I4	Length of the prefix in the "data" record (bytes) : 7 ¹³
105-108	I4	Length of data in the "data" record : 635
109-112	I4	Length of the suffix in the "data" record (bytes) : 0
113-180	A68	Spare

Data record

A data record is composed of 11 non-directional parameters (including the prefix), followed by 14 sets of 23 parameters. 14 observation directions is a maximum for POLDER on ADEOS. Most pixels have either 12 or 13 directional sets of observations; other have less, in particular on both ends of the viewing segment. In the data record, if less than 14 directions are available ($N_{dir} < 14$), the available directions are stacked

¹¹ $i1$ is the line number in the POLDER reference grid. $1 \leq i1 \leq 3240$

¹² See Annexe A for the POLDER standard for filenames

¹³ Note that the sum of the prefix, data and suffix lengths do not yield the record length because there are 6 additional bytes before the prefix.

first, and the end of the record is filled with Dummy values. Note that the N_{dir} sets of measurements do not necessarily correspond to consecutive observation sequences.

In the table below, the parameter number is the number used in the “scaling factor” record of the leader file. As of January 1997, the Offset for the conversion of binary to physical values is 0 for all parameters. The Slope is indicated in the table below. At this time, there is no plan to change these Slope values, nevertheless a careful user should verify that they agree with the values given in the leader file (scaling factors record).

The radiances and Stokes parameters are given in “normalised radiance” units : the radiance (in $W\ m^{-2}\ sr^{-1}$) has been divided by the top of atmosphere incoming irradiance and multiplied by π . It is necessary to divide the parameter by $\cos(\theta_s)$ to transform the measurement to reflectance units.

Position	Param #	Type & Length	Slope	Content
1-4		I4		Record Number in the file : $2 \leq RecNum \leq Nrec + 1$
5-6		I2		Length of this record (bytes): 648
7-8		I2		Line Number of the pixel in the POLDER grid
9-10		I2		Column Number of the pixel in the POLDER grid
11-12		SI2		Pixel altitude from the DEM (meters)
13		I1		Land (100), Water (0) or Mixed (50) indicator
14-41	1	B 28	1	Pixel Quality Index. See Appendix G
42	2	I1	1	Rough Cloud Indicator : Clear (0), Cloudy (100) or Undetermined (50)
43	3	I1	1.4	Solar Azimuth Angle ($^{\circ}$)
44	4	I1	1	Number of available viewing directions : N_{dir} In the following $1 \leq id \leq N_{dir}$
45-46	5	B2	1	Sequence Arrangement Indicator ¹⁴
43 id + 4	23 id - 17	I1	1	Sequence Number in the orbit ¹⁵ : sn ($1 \leq sn \leq 130$)

¹⁴ This two bytes indicator describes, for the 14 directions, whether the acquisition sequence is type A or type B (see the Instrument Setting record in the leader file). bit 0 is for direction #1, bit 13 is for direction #14, bit 14 and bit 15 are not used. The bit is set to 0 (resp. 1) for sequence acquisition type A (resp. B).

¹⁵ This sequence number is needed to identify measurements which have been acquired simultaneously (i.e. during one acquisition), or to retrieve some information about the instrument position, attitude and state during the acquisition (information found in the “Technological parameters” record of the leader file).

43 id + 5 43 id + 6	23 id - 16	SI2	10^{-2}	Line number of the CCD matrix detector which has observed the pixel for filter 670P2
43 id + 7 43 id + 8	23 id - 15	SI2	10^{-2}	Column number of the CCD matrix detector which has observed the pixel for filter 670P2
43 id + 9 43 id + 10	23 id - 14	I2	$1.5 \cdot 10^{-3}$	Solar Zenith Angle ($^{\circ}$)
43 id + 11 43 id + 12	23 id - 13	I2	$1.5 \cdot 10^{-3}$	View Zenith Angle ($^{\circ}$) for filter #8 (670P2) ¹⁶
43 id + 13 43 id + 14	23 id - 12	I2	$6 \cdot 10^{-3}$	Relative Azimuth Angle ($^{\circ}$) for filter #8 (670P2)
43 id + 15	23 id - 11	SI1	$1.6 \cdot 10^{-3}$	$\Delta[\theta_v \cos(\phi)]$: Relative variation of viewing geometry between the filters ($^{\circ}$). See Appendix C
43 id + 16	23 id - 10	SI1	$1.6 \cdot 10^{-3}$	$\Delta[\theta_v \sin(\phi)]$: Relative variation of viewing geometry between the filters ($^{\circ}$). See Appendix C
43 id + 17 43 id + 18	23 id - 9	SI2	10^{-4}	Normalised Radiance for channel 443NP
43 id + 19 43 id + 20	23 id - 8	SI2	10^{-4}	Normalised Radiance for channel 443P
43 id + 21 43 id + 22	23 id - 7	SI2	10^{-4}	Normalised Radiance for channel 490NP
43 id + 23 43 id + 24	23 id - 6	SI2	10^{-4}	Normalised Radiance for channel 565NP
43 id + 25 43 id + 26	23 id - 5	SI2	10^{-4}	Normalised Radiance for channel 670P
43 id + 27 43 id + 28	23 id - 4	SI2	10^{-4}	Normalised Radiance for channel 763NP
43 id + 29 43 id + 30	23 id - 3	SI2	10^{-4}	Normalised Radiance for channel 765NP
43 id + 31 43 id + 32	23 id - 2	SI2	10^{-4}	Normalised Radiance for channel 865P
43 id + 33 43 id + 34	23 id - 1	SI2	10^{-4}	Normalised Radiance for channel 910NP
43 id + 35 43 id + 36	23 id	SI2	10^{-4}	Second component of Stokes Vector (Q) for channel 443P

¹⁶ Due to the satellite velocity and the fact that the 15 measurements are not strictly coincident in time, there is a small variation of view angle between the spectral filters. See Annexe C for details.

43 id + 37 43 id + 38	23 id + 1	SI2	10^{-4}	Second component of Stokes Vector (Q) for channel 670P
43 id + 39 43 id + 40	23 id + 2	SI2	10^{-4}	Second component of Stokes Vector (Q) for channel 865P
43 id + 41 43 id + 42	23 id + 3	SI2	10^{-4}	Third component of Stokes Vector (U) for channel 443P
43 id + 43 43 id + 44	23 id + 4	SI2	10^{-4}	Third component of Stokes Vector (U) for channel 670P
43 id + 45 43 id + 46	23 id + 5	SI2	10^{-4}	Third component of Stokes Vector (U) for channel 865P
43 Ndir + 47 648				Spare

References

Hagolle O, Goloub P, Deschamps PY, et al., Results of POLDER in-flight calibration, *IEEE Trans Geosci. Rem. Sens.* **37** (3) 1550-1566 (1999)

Deschamps, P.Y., F.M. Bréon, M. Leroy, A. Podaire, A. Bricaud, J.C. Buriez, and G. Sèze; 1994: The POLDER Mission: Instrument Characteristics and Scientific Objectives. *IEEE Trans. Geosc. Rem. Sens.* **32**, 598-615.

Acronymes

ADEOS	Advanced Earth Observing Satellite
CCD	Charge Coupled Device
CNES	Centre National d'Etudes Spatiales
DEM	Digital Elevation Model
ECMWF	European Center for Medium Range Weather Forecast
ERBE	Earth Radiation Budget Experiment
ISCCP	International Satellite Cloud Climatology Project
LERTS	Laboratoire d'Etudes et de Recherche en Télédétection Spatiale
LIA	Long Integration Acquisition
LOA	Laboratoire d'Optique Atmosphérique
LSCE	Laboratoire des Sciences du Climat et de l'Environnement
LMD	Laboratoire de Météorologie Dynamique
LPCM	Laboratoire de Physique et Chimie Marines
NDVI	Normalized Difference Vegetation Index
NRE	Normalized Radiant Exitence
NWM	Numerical Weather Model
NASDA	National Space Development Agency of Japan
POLDER	Polarization and Directionality of the Earth Reflectances
SIA	Short Integration Acquisition
TOA	Top of the Atmosphere
TOMS	Total Ozone Mapping Spectrometer
UT	Universal Time

Appendix A : Product identification

This Appendix describes the POLDER standard for product identification.

A standard POLDER product identifier (15 characters) takes the form :

PwLxTyGzccccooov (Browse, level 1 or level 2)

PwLxTyGzaammddv (level 3)

where **W** is the instrument number (1 for POLDER-1 on ADEOS-1, 2 for POLDER-2 on ADEOS-2)

X indicates the product level (1, 2, 3, or 1 for the Browse product)

Y indicates the product thematic (B (as Basic) for level 1 and Browse products, R (as Radiation and clouds) L (as Land surfaces) or O (as Ocean Color) for Level 2 and 3 products)

Z is a code for product type (see table below)

CCC is the ADEOS cycle number ($1 \leq ccc \leq 999$)

OOO is the orbit number in the cycle($1 \leq ooo \leq 585$ for POLDER-1; 057 for POLDER-2)

aammdd is the reference date for the temporal synthesis (year-month-day)

V indicates the reprocessing number (from **A** to **Z**)

Level	Thematic	Product Type	x	y	z	Grid
Browse			1	B	B	
1			1	B	1	Full
2	Clouds & Rad. Budget		2	R	B	Medium
	Ocean & Atm.	Directional parameters (surface)	2	O	A	Full
		Non-Directional param. (surface)	2	O	B	Full
		Aerosols parameters	2	O	C	Medium
	Land & Atm.	Directional parameters (surface)	2	L	A	Full
		Aerosols parameters	2	L	C	Medium
3	Clouds & Rad. Budget	Synthesis	3	R	B	Medium
	Ocean & Atm.	Marine parameters	3	O	B	Full
		Aerosol parameters	3	O	C	Medium
	Land & Atm.	Directional signature param (surf.)	3	L	A	Full
		Albedo & Vegetation parameters	3	L	B	Full
		Atmospheric parameters	3	L	C	Medium


A product consists of two files. A *leader file* and a *data file*. The *leader file* filename takes the form aaaL where aaa is the product identifier (15 characters). Similarly, the *data file* filename is aaaD.

In the table above, the last column indicates the resolution of the grid used for the corresponding product.

Appendix B : POLDER Full resolution reference grid

The POLDER Full resolution grid is used for level 1 products as well as surface parameters of the level 2 and 3 products.

The POLDER reference grid is based on the sinusoidal equal area projection (Sanson-Flamsted). The step is constant along a meridian with a resolution of 1/18 degrees. Thus, there are $180 \times 18 = 3240$ lines from pole to pole. Along a parallel, the step is chosen in order to have a resolution as constant as possible. The number of pixels from 180 W to 180 E is chosen equal to $2 \times \text{NINT}[3240 \cos(\text{latitude})]$ where NINT stands for *nearest integer*.

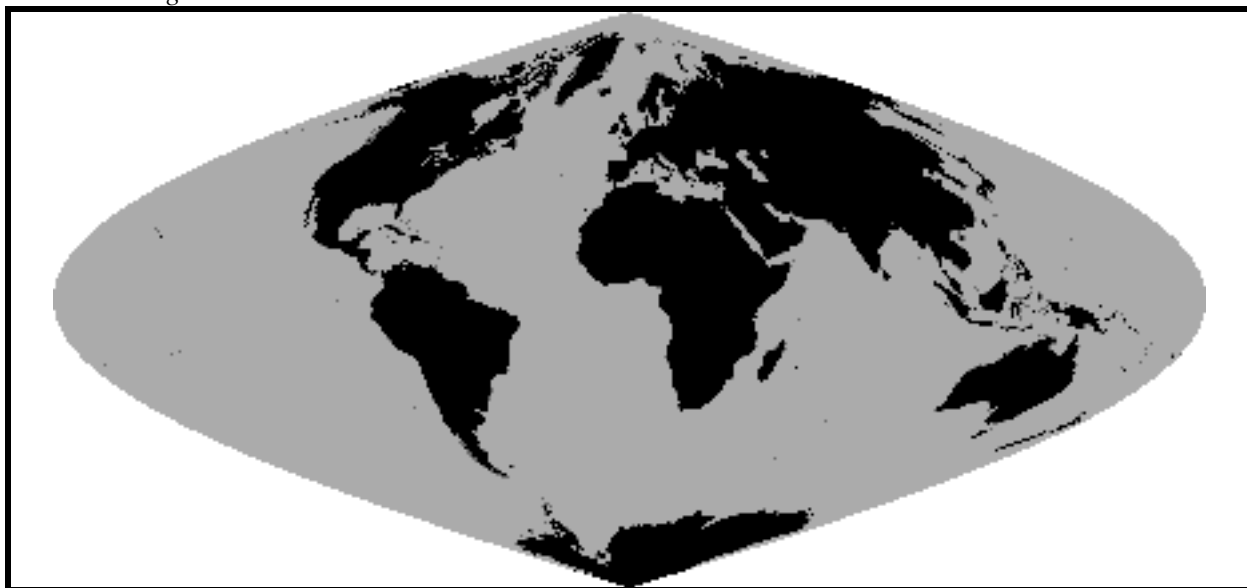

lin is 1 to 3240 from top to bottom

col is 1 to 6480 from left to right

Note that, in the real world, the coordinates of the neighbours of a given pixel (*lin*, *col*) are *not* necessarily given by ($lin \pm 1$, $col \pm 1$). It is necessary to account for the deformation of the projection with the longitude.

The following equations yield the latitude and longitude of a pixel given by its (*lin*,*col*) coordinates in the POLDER reference grid :

$$lat = 90 - \frac{lin - 0.5}{18}$$

$$N_i = \text{NINT}[3240 \cos(lat)]$$

$$lon = \frac{180}{N_i} (col - 3240.5)$$

The following equations yield the (*lin*,*col*) coordinates in the POLDER reference grid for a pixel of given latitude and longitude :

$$lin = \text{NINT}[18(90 - lat) + 0.5]$$

$$N_i = \text{NINT}\left[3240 \sin\left(\frac{\text{lin} - 0.5}{18}\right)\right]$$
$$\text{col} = \text{NINT}\left[3240.5 + \frac{N_i}{180} \text{lon}\right]$$

This POLDER reference grid is centered on the Greenwich meridian. For the extraction and visualisation of POLDER data close to the 180° longitude line, it may be easier to work with a similar grid centered on this meridian. A simple formula allows to switch from one (lin,col) coordinate system to the other (lin',col') :

$$\text{lin}' = \text{lin}$$
$$N_i = \text{NINT}\left[3240 \sin\left(\frac{\text{lin} - 0.5}{18}\right)\right]$$
$$\text{col}' = 3241 - N_i + \text{MOD}_{2N_i}(\text{col} + 2N_i - 3241)$$

where MOD_{2N_i} returns the remainder of the integer division by $2N_i$.

Appendix C : Method for deriving the viewing geometry for each channel

With the POLDER imaging concept, the 15 spectral/polarized measurements are acquired sequentially. Therefore, a given surface target is observed, for the various spectral bands, with slightly different viewing angles. The differences are very small, but can be significant for some applications which need a very high angular accuracy, such as the atmospheric correction over the ocean.

The view zenith angle (θ_0 =VZA) and relative azimuth (φ_0 =RelAzim) which are given in the level 1 product are for the central filter, i.e. 670P2. The two parameters $DVzC=\Delta[\theta_v \cos(\phi)]$ and $DVzS=\Delta[\theta_v \sin(\phi)]$, which are given for each viewing direction in the data file, are necessary to derive these angles for other spectral bands θ_j and φ_j . The formulae are as follows:

$$\begin{aligned}\theta_j &= \sqrt{(\theta_0 \cos \varphi_0 + X_j DVzC)^2 + (\theta_0 \sin \varphi_0 + X_j DVzS)^2} \\ &= \sqrt{\theta_0^2 + 2 X_j \theta_0 [\cos \varphi_0 DVzC + \sin \varphi_0 DVzS] + (X_j)^2 [DVzC^2 + DVzS^2]}\end{aligned}$$

$$\varphi_j = \arctan \left[\frac{\theta_0 \sin \varphi_0 + X_j DVzS}{\theta_0 \cos \varphi_0 + X_j DVzC} \right]$$

$$\text{IF } \theta_0 \cos \varphi_0 + X_j DVzC < 0 \text{ THEN } \varphi_j = \varphi_j + 180^\circ$$

where X_j is given in the table below:

X_j =	-6	-4	-3	-2	0	2	3	4	6
Channel	443P	443NP	490	565	670	763	765	910	865

Note: This formulation is based on the simple principle that the 15 measurements are acquired equally spaced and on a straight line in an angular system of orthogonal axis ($\theta \sin \varphi$, $\theta \cos \varphi$)

Appendix D : Manipulation of polarization parameters

The POLDER level-1 product provides the second, Q, and third, U, parameters of the Stokes vector. The Stokes vector is defined with respect to the reference frame defined by the viewing direction and the local zenith.

The polarized radiance I_p and polarization direction χ can be derived from Q and U through :

$$\begin{aligned} I_p &= (Q^2 + U^2)^{1/2} \\ I_p \sin(2\chi) &= U \\ I_p \cos(2\chi) &= Q \end{aligned}$$

In the equations above, the polarization angle χ is referred to the plane defined by the local zenith and the viewing direction. The following equations yield the polarization angle referred to the scattering plane (defined by the sun and view directions).

$$\chi = \arctan(U / Q) / 2$$

$$\text{IF } (Q < 0) \chi = \chi + \pi/2$$

$$\tan(\alpha) = \frac{\sin(\phi)}{\frac{\sin(\theta_v)}{\tan(\theta_s)} - \cos(\theta_v) \cos(\phi)}$$

$$\psi = \chi - \alpha$$

where ψ is the polarization direction defined with respect to the scattering plane.

Note that both ψ and χ are defined modulo π .

In general, ψ is close to $\pm\pi/2$.

Appendix E : ADEOS-1 and 2 orbital characteristics

Sat	Symbol	ADEOS-1	ADEOS-2
Repeat Cycle	C	41	4
Number of Revolutions	Norb	585	57
Origin of Longitudes	LonEq ₀	191.980	185.394
Origin of times (Julian)	J ₀	2450308.41216167	2452619.41641050
Local Time at origin of times	Hloc ₀	10.690525	10.3534
Correction factor for local time	corH	[-0.0077771851, 1.2939654e-05, -3.9683356e-09, 2.2428582e-13]	[-0.0361971, 4.949845e-05, -1.82803e-09, 0.]

ADEOS(1 and 2) are sun-synchronous polar satellites. The satellite subtracks are repeated with a period of respectively 41 and 4 days, which defines an orbit repeat cycle. During this period, the ADEOS 1 and 2 satellite makes 585 and 57 revolutions around the Earth respectively.

The following equations allow an easy computation of equator crossing time, local time at equator and date. They make use of the Julian day, which is an integer at noon.

The accumulated orbit number is defined as

$$aaa = (ooo-1) * Norb + ccc$$

where ccc and ooo are the cycle and orbit number respectively

From aaa, the longitude at the equator is given by

$$lonEq = lonEq_0 - aaa * 360 * C / Norb$$

The Julian day for the equator crossing time is given by :

$$Jul = J_0 + aaa * C / Norb + sum / 24$$

where $sum = corH[0] + corH[1] * aaa + corH[1] * aaa^2 + corH[1] * aaa^3$

Inversely, one can retrieve the accumulated orbit number from a Julian date Jday through:

$$bbb = (jday - J_0) * Norb / C$$

$$sum = corH[0] + corH[1] * bbb + corH[1] * bbb^2 + corH[1] * bbb^3$$

$$aaa = ROUND(bbb - sum / 24 * Norb / C)$$

where ROUND returns the closest integer

Appendix F : POLDER radiometric model

The POLDER CCD pixels are numbered (i, j) as seen in Figure 1. For the polarized bands, analyser 2 is parallel to axis j (matrix smaller axis) and analysers 1 and 3 are turned by about $\pm 60^\circ$ from analyser 2.

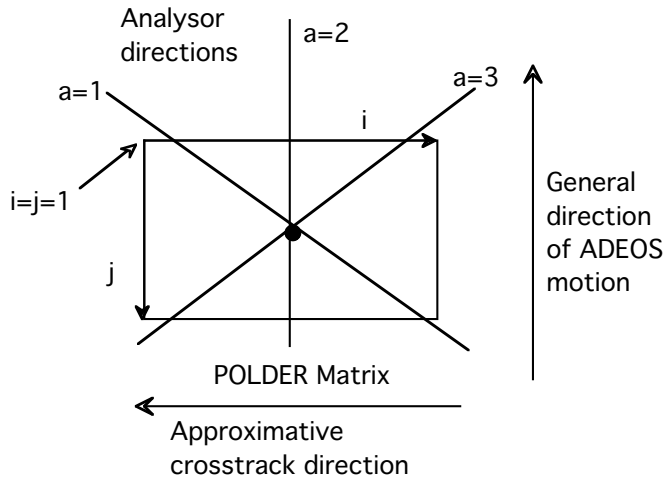


Figure 1

The matrix pixel (i, j) images the incident radiance corresponding to zenith viewing angle θ and azimuth viewing angle ϕ such that

$$\theta = \text{Arctg}(\sqrt{d_c^2(i - i_0)^2 + d_a^2(j - j_0)^2} / f), \quad \text{tg}(\phi) = \frac{d_a(j - j_0)}{d_c(i - i_0)},$$

where (i_0, j_0) correspond to the central pixel, f is the instrument focal length, and (d_a, d_c) are the CCD pixel sizes (a CCD pixel is not square). Note that these angles are defined in the instrument reference frame, not in the target Earth-fixed frame.

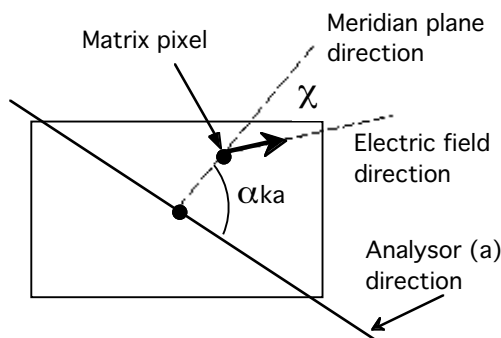


Figure 2

The incident light is assumed to be linearly polarized, and its Stokes parameters (I, Q, U) are defined with respect to axes (l, r) respectively parallel and perpendicular to the meridian plane. For a perfect instrument, the numerical count CN_{ij}^{ka} corresponding to pixel (i, j) in wavelength filter k ($k = 1, 2, \dots, 9$), and polarizer number a , ($a = 1, 2, 3$) writes:

$$CN_{ij}^{ka} = A_k \left(I + \cos(2\alpha^{ka})Q + \sin(2\alpha^{ka})U \right) \quad (1)$$

where A_k is the calibration coefficient and α^{ka} stands for the angle between the meridian plane and the analyser a directions.

The instrument is not perfect however, and we write the radiometric model in a generalized form:

$$CN_{ij}^{ka} = t A_k g_{ij}^{ka} p^k(\theta) T^{ka} \left(P_I^{ka} I + P_Q^{ka} Q + P_U^{ka} U \right) + CN_{ij}^0 \quad (2)$$

where:

- CN_{ij}^0 is the darkness current;
- t is the integration time (ms)
- $p^k(\theta)$ accounts for the low frequency variation of the optics transmission; it is normalized to $p^k(\theta = 0) = 1$;
- g_{ij}^{ka} is the matrix pixel equalization coefficient, which takes into account high frequency variations in the optics transmission and in the CCD sensitivities. For each filter $g_{i_0, j_0}^{ka} = 1$ for the central pixel ($i_0=121, j_0=137$);
- T^{ka} accounts for differences in the transmission of the 3 analysors of one given spectral band. It is normalized according to $T^{k2} = 1$ for the central analyzor.

In a first order correction of the lens and filters optical effects, the coefficients P_I , P_Q , and P_U can be written as:

$$\begin{aligned} P_I^{ka} &= 1 + \eta^k \varepsilon^k(\theta) \cos(2\alpha_p^{ka}) \\ P_Q^{ka} &= \eta^k \left(\varepsilon^k(\theta) + \cos(2\alpha_p^{ka}) - \xi^{ka} \sin(2\alpha_p^{ka}) \right) \\ P_U^{ka} &= \eta^k \left(\sin(2\alpha_p^{ka}) + \xi^{ka} \cos(2\alpha_p^{ka}) \right) \end{aligned} \quad (3)$$

with

$$\begin{aligned} 2\alpha_p^{k1} &= 2\alpha^{k2} - 120 = 2\alpha^{k1} - \xi^{k1} \\ 2\alpha_p^{k1} &= 2\alpha^{k2} \quad \xi^{k2} = 0 \\ 2\alpha_p^{k3} &= 2\alpha^{k2} + 120 = 2\alpha^{k3} - \xi^{k3} \end{aligned} \quad (4)$$

The physical interpretation of the correction terms used in eq. (3) and (4) are given below:

- η^k (which is on the order of 1) accounts for the imperfect extinction of the polaroids. It varies with wavelength and with the integration time (because of the polarizer rotations during the acquisition).
- $\varepsilon^k(\theta)$ ($\ll 1$) accounts for the linear polarization induced by the optics, an effect which is nearly radial, symmetric around the optical axis, and null for the central pixel. $\varepsilon^k(\theta)$ varies with wavelength.
- α^{k2} is the orientation of polarizer 2 with respect to the meridian plane (see Fig. 2)
- α_p^{k1} and α_p^{k3} are two directions $\pm 60^\circ$ from the orientation of polarizer 2.

- ξ^{k1} and ξ^{k3} account for the departures of polarizers 1 and 3 with respect to their ideal positioning, $\pm 60^\circ$ from polarizer 2.

Note that, the formulation used in (3) yields:

$$\sum_{a=1}^3 \cos(2\alpha_p^{ka}) = 0 \quad \sum_{a=1}^3 \sin(2\alpha_p^{ka}) = 0 \quad (5)$$

The signal modeling defined by eqs.(1) to (4) was tested with laboratory measurements, using an integrating sphere, which provided incident unpolarized light, and a transmission device capable of polarizing the incident light by a calibrated, adjustable amount. Level 1 radiometric processing yield the (I, Q, U) Stokes parameters from the CN_{ij}^{ka} numerical counts. The various calibration coefficients which are needed for this inversion have been measured before launch, and are monitored in flight using geophysical targets of known reflectance, spectral signature and polarization properties.

Appendix G : Pixel Quality Index (DQX)

The Level-1 data record includes an indicator of the pixel data quality. This indicator is 28 bytes long, which corresponds to 2 bytes (16 bits) per viewing direction. The first two bytes are for direction number 1, the last two bytes are for directions number 14.

The data quality is nominal when all bits of the DQX are 0. Various causes may yield a degraded measurement quality, which affect POLDER bands differently. Moreover, the various scientific objectives of the POLDER mission have different radiometric quality requirements. This is why different thresholds have been set by the mission team to label a set of bands as “nominal” or “degraded”.

In the table below, bit 1 is the least significative, and bit 16 is the most significative. The bit value is 1 if the condition is true.

bit #	Affected bands	Condition
1	All	Geometric corrections may be degraded (ADEOS roll, pitch or yaw greater than a threshold)
2	670P	No correction for near-infrared band transmittance (because 865P measurement is saturated or lacking)
3	443NP	No correction for optic polarization (lack of 443P measurement)
4	490, 565, 763, 765, 910	No correction for optic polarization (lack of polarization measurements)
5	443P	Pixel saturated/lacking in the 4x4 window used for bicubic interpolation
6	443NP, 490, 565	Pixel saturated/lacking in the 4x4 window used for bicubic interpolation
7	670	Pixel saturated/lacking in the 4x4 window used for bicubic interpolation
8	763, 765, 865, 910	Pixel saturated/lacking in the 4x4 window used for bicubic interpolation
9	443P	CCD pixel may be degraded (matrix border)
10	443NP, 490, 565	CCD pixel may be degraded (matrix border)
11	670	CCD pixel may be degraded (matrix border)
12	763, 765, 865, 910	CCD pixel may be degraded (matrix border)
13	443NP, 490, 565, 670, 763, 765, 865	Stray light correction (type 1) greater than a threshold. The thresholds are defined by the ocean color mission requirements.
14	443P, 670, 763, 765, 865, 910	Stray light correction (type 1) greater than a threshold. The thresholds are defined by the other mission requirements.
15	443NP, 490, 565, 670, 763, 765, 865	Stray light correction (type 2) greater than a threshold. The thresholds are defined by the ocean color mission requirements.
16	443P, 670, 763, 765, 865, 910	Stray light correction (type 2) greater than a threshold. The thresholds are defined by the other mission requirements.

Appendix H : How to locate a particular pixel in the data file

The pixels of the POLDER reference grid are arranged in the data file line by line and column by column. The last record of the leader file includes an array $Npix[3240]$ which gives the number of pixels in the data file for each of the 3240 lines of the POLDER grid. This array can be used for a fast location of a particular pixel in the data file :

Let il_0 and ic_0 be the line and column coordinates of the pixel in the POLDER reference grid. The POLDER measurements for this pixel are located in the data file in record number rec_0 . The following relation apply :

$$2 + \sum_{il=1}^{il_0-1} Npix[il] \leq rec_0 \leq 1 + \sum_{il=1}^{il_0} Npix[il]$$

One method to retrieve the pixel is to read all records which satisfy the relation above, and to read the corresponding column number.

Another, faster, method uses the dicotomy and it is shown below :

$$irecmax = 1 + \sum_{il=1}^{il_0} Npix[il]$$

$rec_0 = 0$

WHILE [($rec_0 = 0$) AND ($irecmax \geq irecmin$)] DO

$irec = (irecmax + irecmin) / 2$ (if the ratio is not an integer, perform an integer truncation)

READ record number $irec$, and get the corresponding column number ic .

IF ($ic = ic_0$) $rec_0 = irec$

IF ($ic > ic_0$) $irecmax = irec$

IF ($ic < ic_0$) $irecmin = irec + 1$

END DO

If ($rec_0 = 0$), there is no data corresponding to the selected pixel in the data file.